
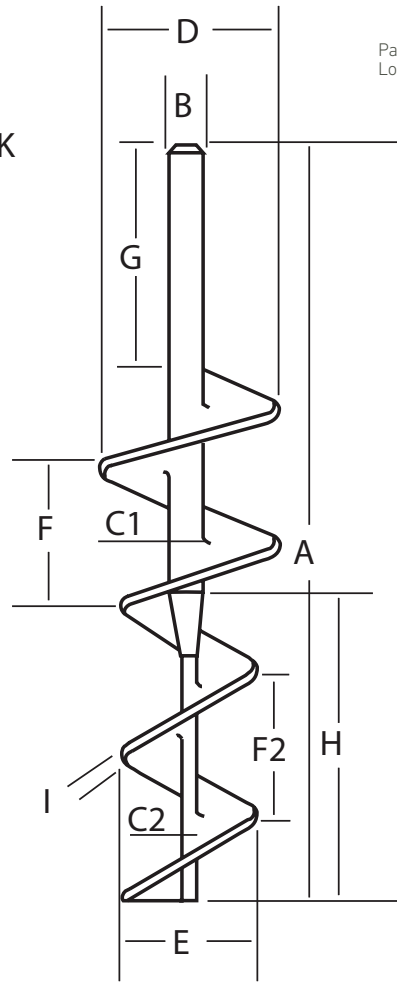



ALL-FILL, AMS, MATEER-BURT, & SPEE-DEE SELF-FEEDING AUGERS

Self-Feeding Augers are used for non-freeflowing powders such as Bakery mixes, Carbon, Talcum Powder, etc. They are commonly used with a slow speed agitator blade, a high speed (Type D) agitator blade, and a Lip Funnel. For products that drip at the end of the fill, a Drip Washer is often installed. Use this page to specify new and replacement Self-Feeding Augers used with ALL-FILL, AMS, Mateer-Burt and Spee-Dee auger filling machines. Mateer-Burt augers are specified in Form 653.

DIMENSIONS

- A: Overall Length: _____
- B: Stem Diameter: _____
- C1: Rod Diameter: _____
- C2: Rod Diameter: _____
- D: Overflight Diameter: _____
- E: Diameter: _____
- F: Pitch: _____
- G: Stem Length: _____
- H: Straight Flight: _____
- I: Flight Thickness: _____
- J: Depth of Thread: _____
- J2: Type of Thread: _____
- K: Pin Location: _____
- L: Pin Diameter: _____
- M: Pin Length: _____
- N: Flight Relief: _____ Yes _____ No _____



Part Number
Located Here



MATERIAL OF CONSTRUCTION:

WELD: Tack Continuous 1 Side Both Sides

FINISH: Rough Grind Nylon Smooth High Polish

STEM: Bayonet(shown) Other

4102 Edges Mill Road, Downingtown, PA 19335 USA
 Phone (610) 524-3350 Fax (610) 363-2821
 Toll Free: 800-334-1529 info@auger-fab.com
WWW.AUGER-FAB.COM

